


TH5812E



外形尺寸

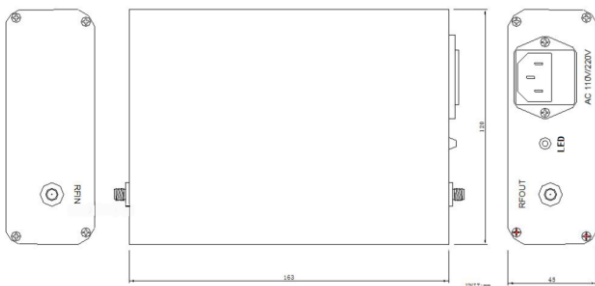

■ 频率范围	0.1 - 2500MHz
■ 增益	30dB typ
■ P1dB	20dBm typ
■ 噪声系数	3.5dB@1.0GHz typ

技术指标@25°C

频率范围	0.1-2500MHz
增益	30dB typ
增益平坦度	±2dB typ
P1dB	20dBm typ
输入驻波	2.0 :1
输出驻波	2.5 :1
噪声系数	3.5dB@1.0GHz typ
电压AC	110-240 V
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
最大入口功率	-10dBm

订单描述

测试曲线 (Temp @+25°C)

TH5812E



指标特性

